


BELAY SYSTEM – ARTIFICIAL SURFACES (AT A WORKPLACE – OHS LAWS APPLY)

- Means a fixed belay system which is installed as part of a fall protection system on an artificial climbing surface. Belay systems are normally installed at permanent facilities and as such, OHS laws apply. PACI protocols require belays systems to be installed to reduce risk in accordance with the ALARA principle (as low as reasonably achievable).



PACI Head Office
 PO Box 362, Hyde Park
 TOWNSVILLE Q 4812
 Tel +61 7 4721 4746
 Fax +61 7 4771 4150
 Email: info@paci.com.au
 Web: www.paci.com.au

PACI approved belay system:

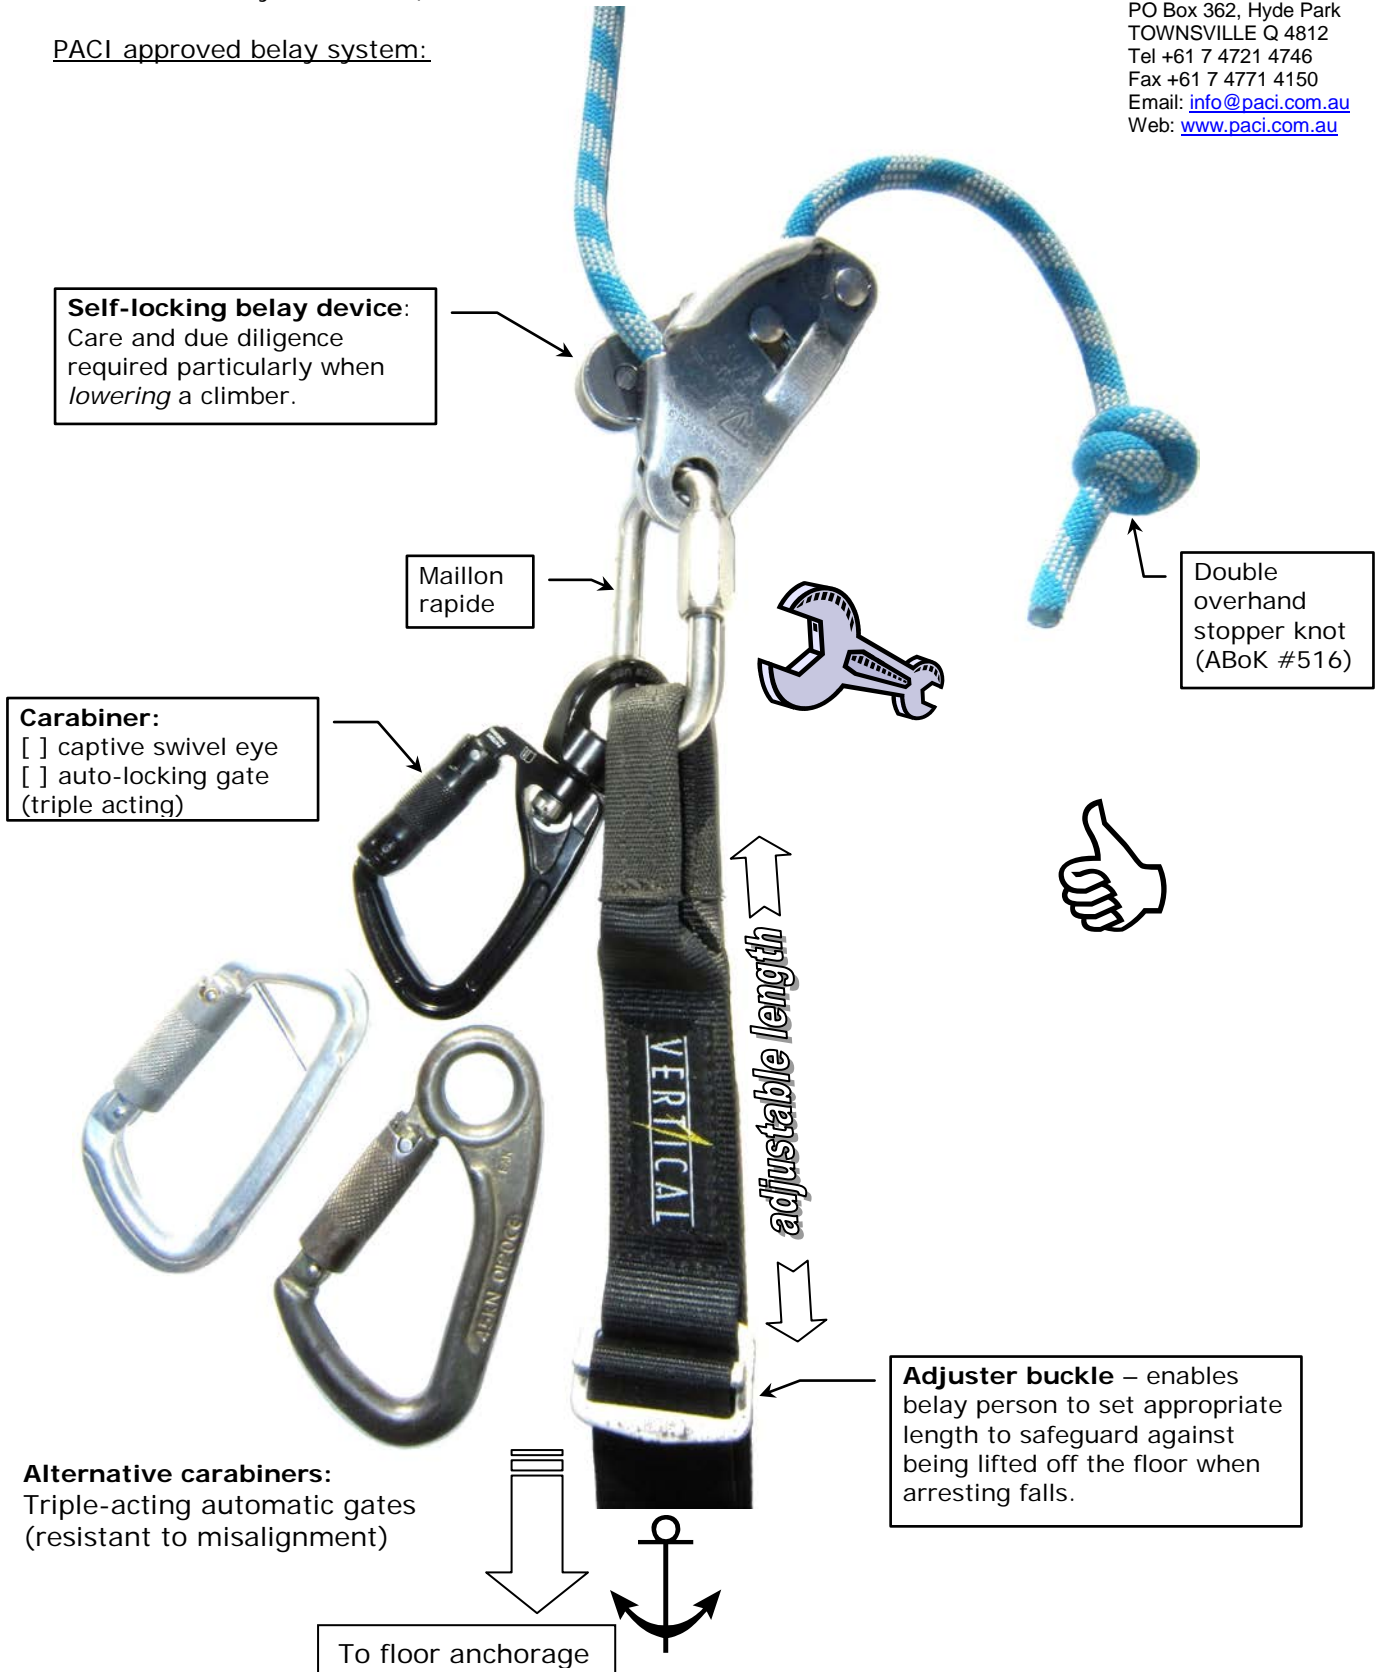

BELAY SYSTEM – ARTIFICIAL SURFACES (AT A WORKPLACE – OHS LAWS APPLY)
- Alternative configurations

PACI approved belay system:

Tubular belay device:
Care and due diligence required when *belaying* a climber. Device is not self-locking, continuous hand contact with rope is required.

Maillon rapide


Carabiner:
[] captive eye
[] auto-locking gate (triple acting)

Double overhand stopper knot (ABoK #516)

Adjuster buckle – enables belay person to set appropriate length to safeguard against being lifted off the floor when arresting falls.

To floor anchorage

adjustable length

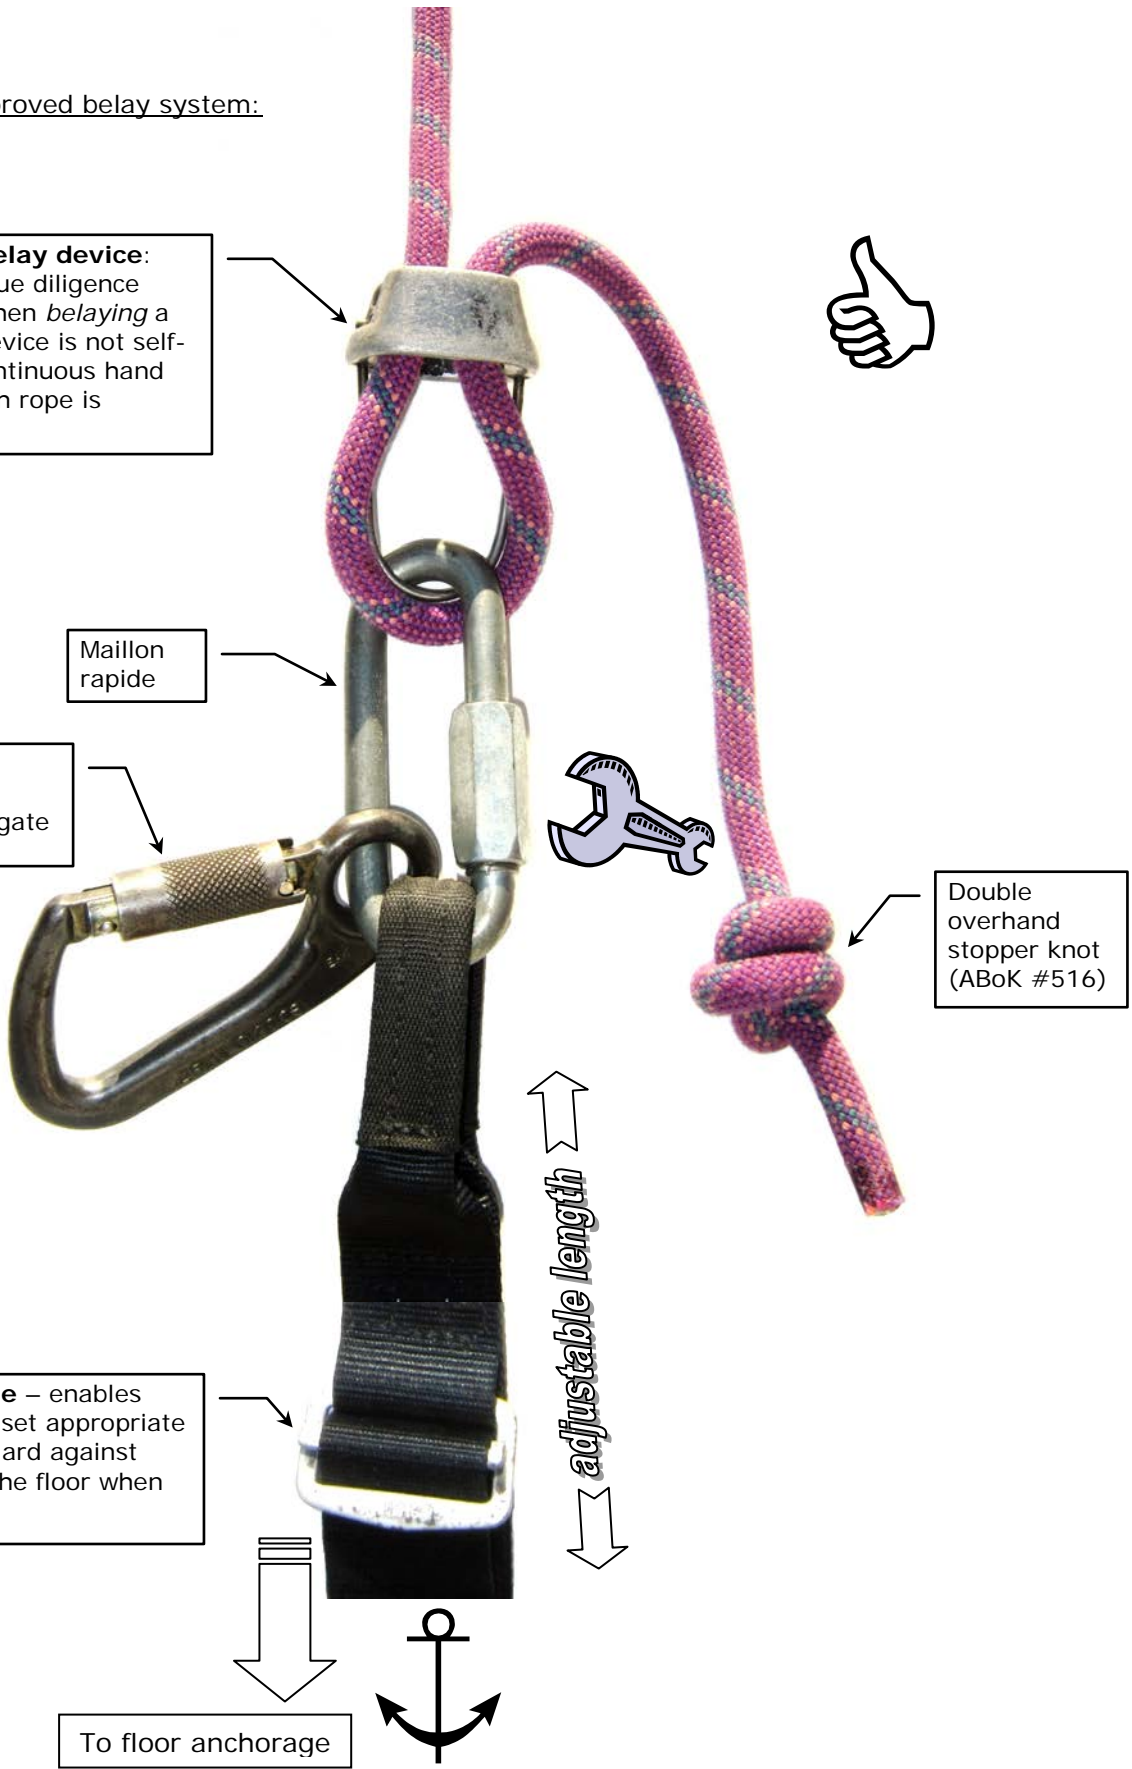

BELAY SYSTEM – ARTIFICIAL SURFACES (AT A WORKPLACE – OHS LAWS APPLY)
- Unacceptable configurations

NOT PACI approved:

